



名称: 气动微型平行三爪  
Name: Pneumatic Mini parallel three claws  
型号 (Model) : FY-MGD802-6  
P:空气压力 (bar) P:Air Pressure(bar)  
L:到作用点距离 (mm) L:Exertion Length(mm)  
开闭范围 (Stoke) :7.4mm  
产品重量 (Weight):0.055kg  
最大附件长度 (Max. length attach):35mm  
配管接口 (Fitting size):M3-6H  
理论夹持力-开 (Gripping force :Open):45N  
理论夹持力-闭 (Gripping force : Close):40N  
单循环空气消耗量 (Air consumption per cycle):0.3cm<sup>3</sup>  
开闭时间 (Closeing/Opening time):0.02/0.02sec  
重复精度 (Repeat accuracy):0.02mm  
连续使用次数 (Continuation usage amount):60  
使用气压 (Operating pressure):3-7bar  
周围温度 (Ambient temperature): -5 to 60℃ (-10 to 130℃)  
润滑 (Lubrication):不需要 (Needless)  
根据IEC60529标准安全防护:IP64  
Safety protection according to IEC60529 standard:IP64  
所有数据在 6 Bar时测量 (All data were measured at 6 Bar)  
重复精度: 连续动作100次以后的检测值  
After 100 consecutive strokes to end positions

#### 夹持力图表

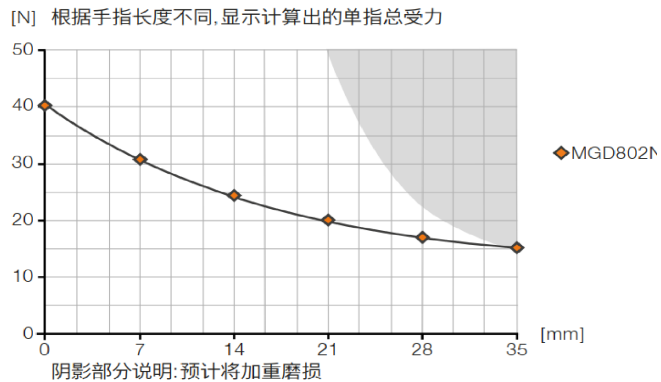

#### 力和力矩

显示除夹持力外可能作用的静力和力矩。



Mr [Nm]	4
Mx [Nm]	4
My [Nm]	6
Fa [N]	100

#### 警告:

- 当操作夹爪工作时, 请人员务必远离夹爪和机器人的活动部位, 否则将会造成人身伤害的险;
- 由于不同物件有其不同的摩擦系数, 当初次夹持工件时, 请在空旷场地进行试夹, 确保夹稳固后方可装机工作, 否则将会有跌落工件砸伤机器或人员的风险

#### Warning:

- When operating the gripper, please keep away from it Gripper and robot's moving parts, otherwise it will Risk of personal injury;
- Because different objects have different friction coefficients, When clamping the workpiece for the first time, please try clamping in an open field. Ensure that the clamping is firm before the machine can work, otherwise it will There is a risk that falling workpieces may damage machines or personnel.