






FOYOT

知识产权声明:
本设计的结构和技术参数的知识产权归:
江蘇錫電子科技有限公司 所有,在未經
本公司書面許可,不得復制、轉讓或仿制。
如發現被復制或仿制將受到法律的嚴懲。






因改良等原因,规格以及外观有所变更时,不再另行通知, 敬请谅解。
Without further notice if specification and exterior have been
changed because of improvement thanks for your understanding

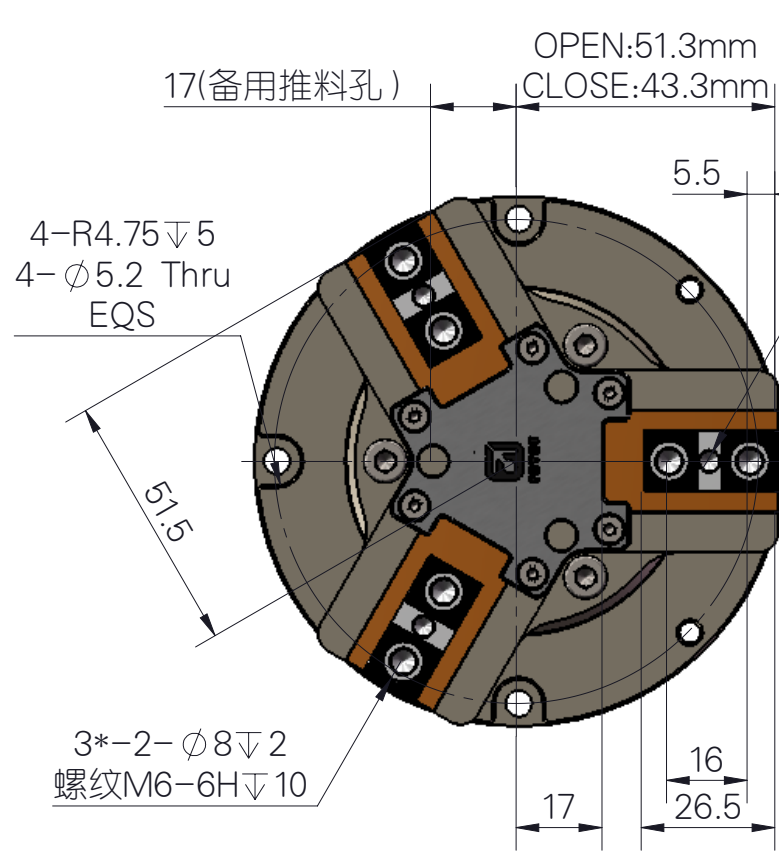

Magnetic Sensor
Model: D-A93 or
SK-8PN or D-M9P

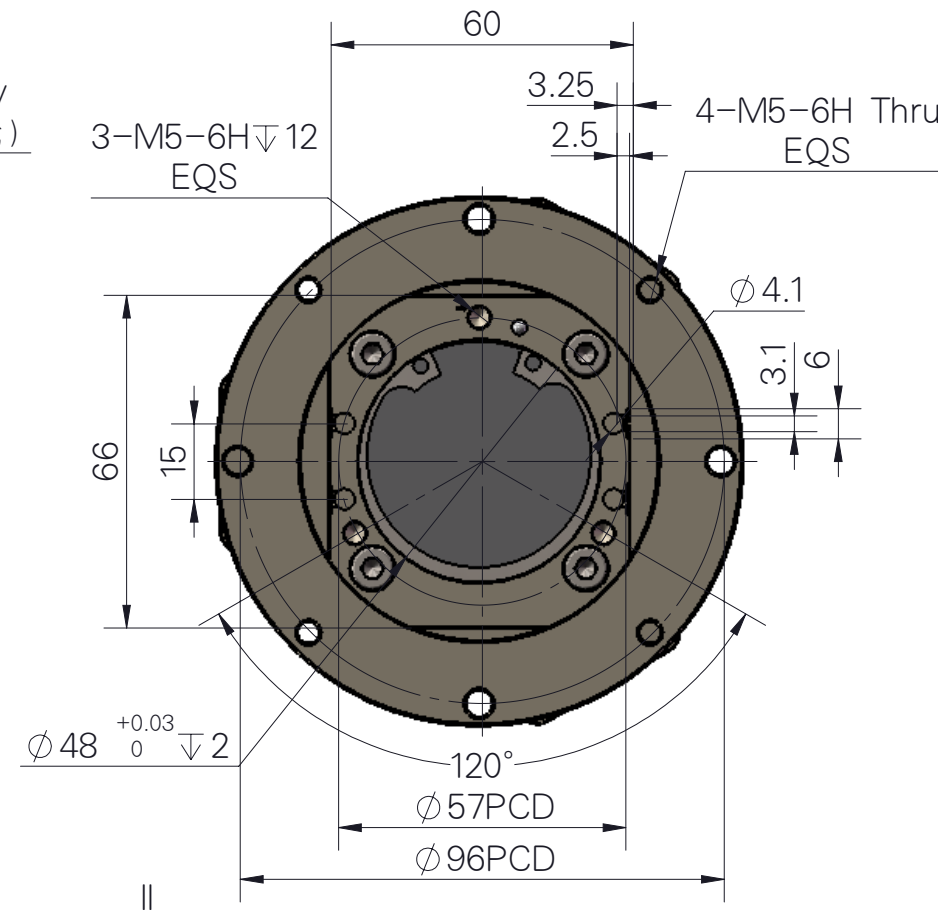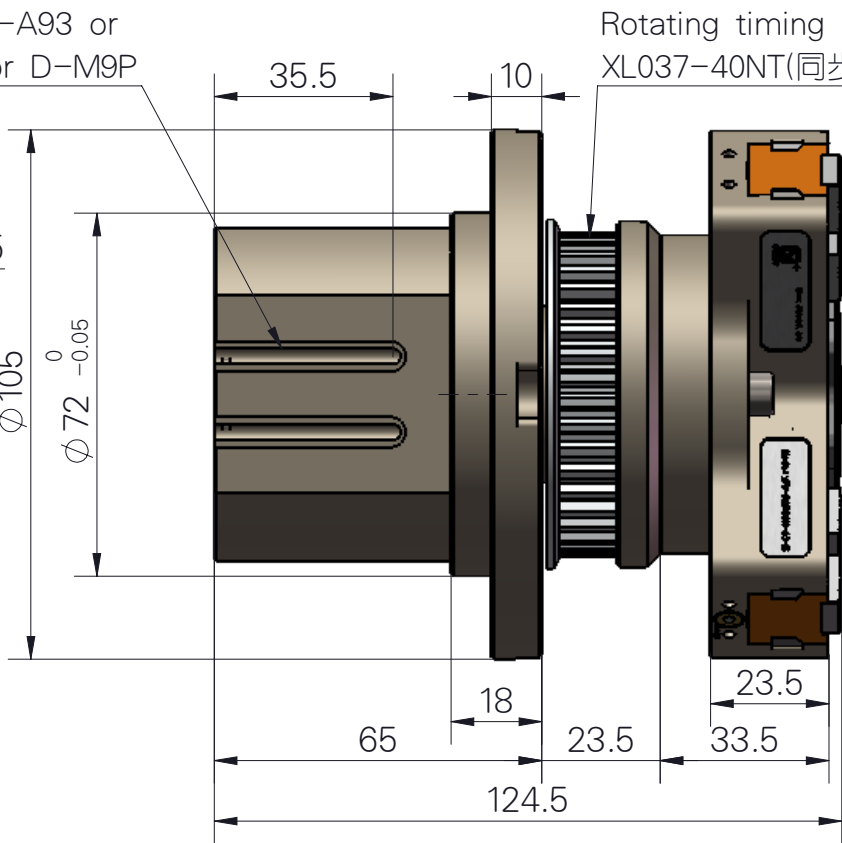

所配的气管接头

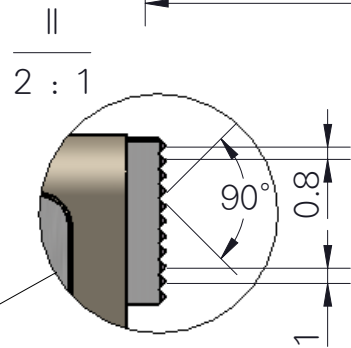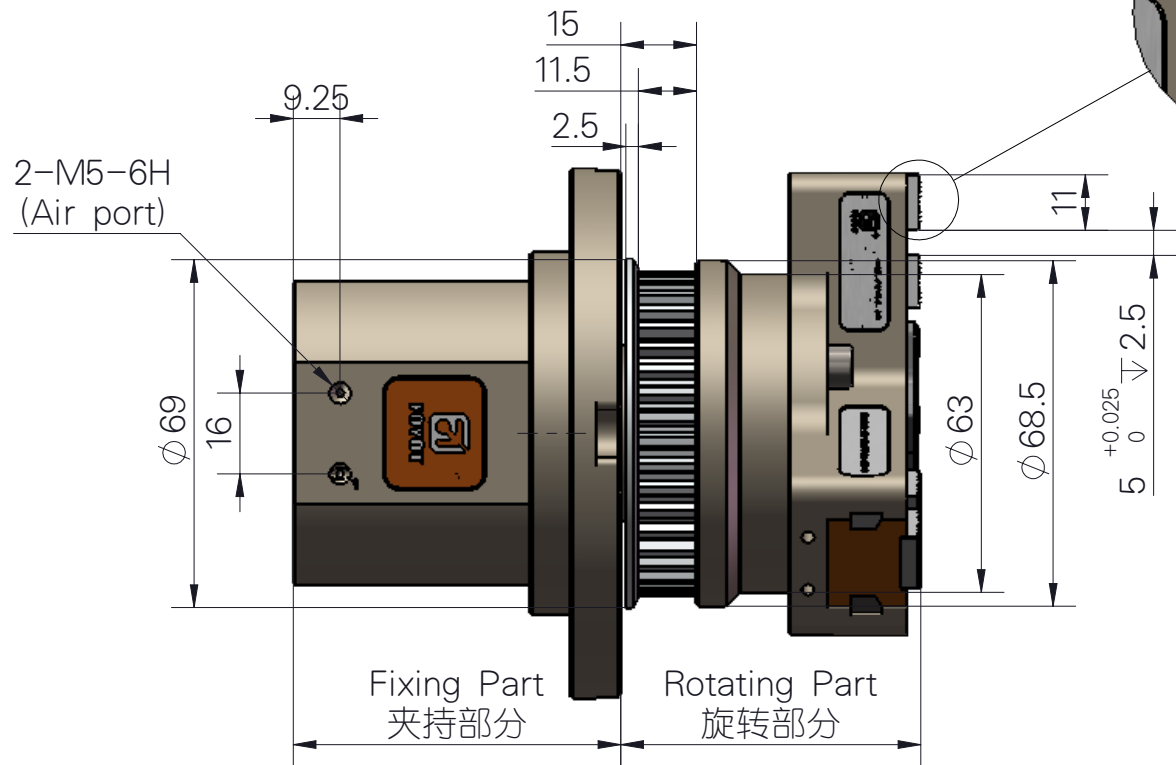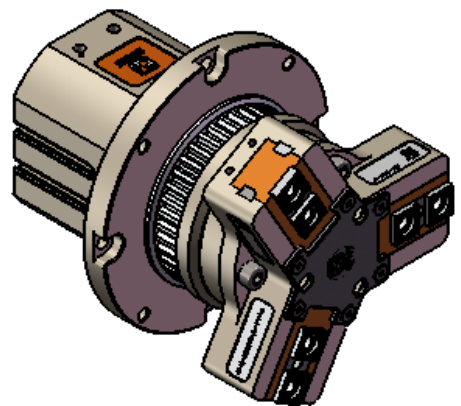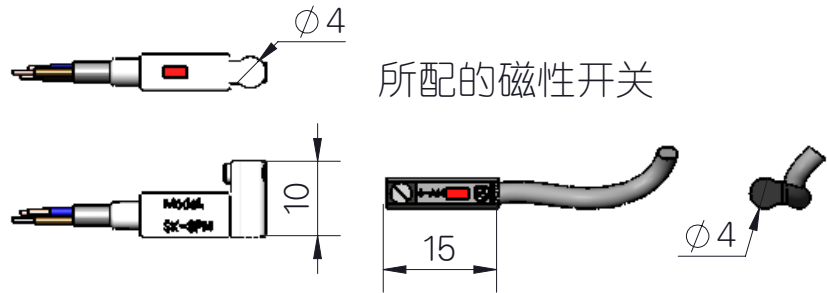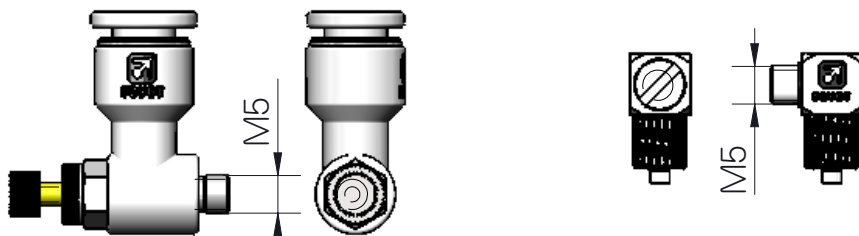

该齿为方便用户做可调手指
之用,可扩展夹爪的夹持范围

名称: 气动无限连续旋转并夹持三爪-D63
型号 (Model): FY-RAF56N-63-B
P:空气压力 (bar) P:Air Pressure(bar)
L:到作用点距离 (mm) L:Exertion Length(mm)
开闭范围 (Stoke): 16mm
产品重量 (Weight):1.56kg
最大指端长度(Max. length attach):60mm
配管连接口(Fitting size):M5-6H
理论夹持力-开(Gripping force :Open):1000N
理论夹持力-闭(Gripping force : Close):892.7N
单循环空气消耗量(Air consumption per cycle):38.2cm³
开闭时间(Closeing/Opening time):0.06/0.06sec
重复精度Repeat accuracy):0.01mm
连续使用次数(Continuation usage amount):60
使用气压(Operating pressure):3-8bar
周围温度(Ambient temperature): -5 to 60°C(-10 to 130°C)
润滑(Lubrication):不需要 (Needless)
根据IEC60529标准安全防护:IP64
Safety protection according to IEC60529 standard:IP64
所有数据在7 Bar时测量(All data were measured at 7 Bar)
重复精度: 连续动作100次以后的检测值
After 100 consecutive strokes to end positions

Notes:
最大转速 (Admissible RPM is):100
扭矩载荷 (At air Pressure:0-0.5MPa Load torque):0.4~2.8N. M